

EZ-Fit Sheds Instruction Manual

Thank-you for purchasing an EZ-Fit Shed! Our goal is to provide you with everything you need to make the assembly of your shed kit go smoothly.

This instruction manual is based on a 10x12 "Heritage" style building.

Your shed kit may be a different size or style - if this is the case you may have a different amount of wall panels and roof sheathing, however the same assembly principals apply.

There is paperwork included with your packing slip that shows the details on the wall panels and roof sheathing included for your particular shed kit.

Heritage, Homestead and Riverside sheds all have the same roof design. If you purchased the Cornerstone shed, refer to the manual with photos for more details on the roof design.

Also, this manual includes assembly instructions for the optional floor kit. If you purchased your own flooring materials elsewhere, you may refer to this section for tips on assembly. If you are using concrete for your floor, simply disregard this part of the instructions.

Following is a list of which fasteners get used where. Again, refer to the packing slip for a list of fasteners that were sent with your shed kit.

2" Nails:

Fastening 3/4" plywood flooring to floor joists (optional floor kit.)

Corner trim

Roof sheathing

Roof gussets

Fastening Smartside Soffit to sidewalls

Fastening rafters to soffit

Facia trim

Windows and window trim.

2.5" Square-Drive Screws:

Fastening wall panels together

Double 2x4" top/plates

Fastening bottom/plate of walls down into floor. (once building is assembled)

Tools Needed:

■ Cordless Drill



■ Tape Measure



■ Step-ladder



■ Skilsaw



■ Chalkline



■ Speed Square



■ Level




■ Hammer




Floor Construction

Top View of floor framing


To make that floor is square:
Measure diagonally across corners and make that both measurements are same.


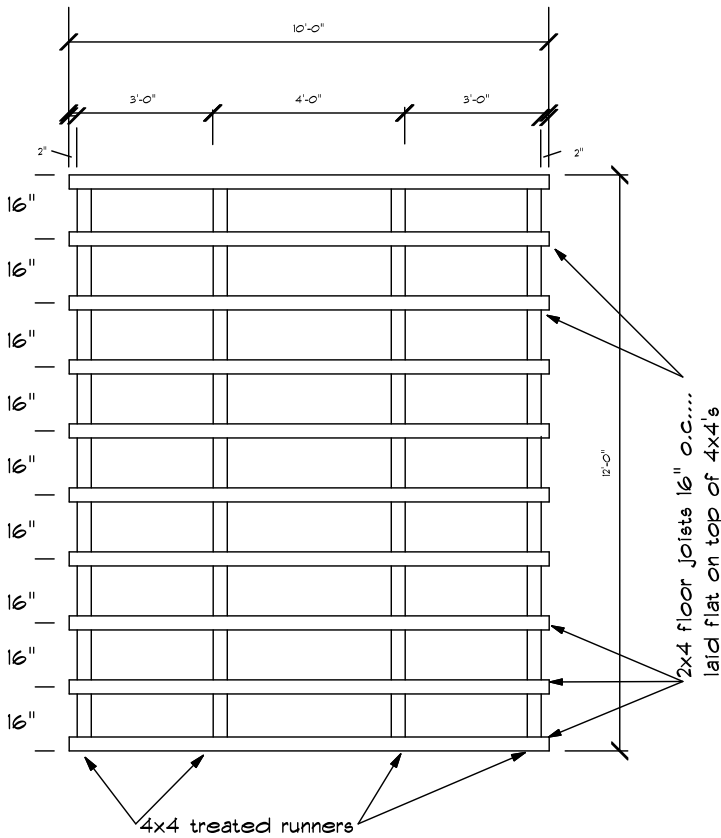


Top View of plywood

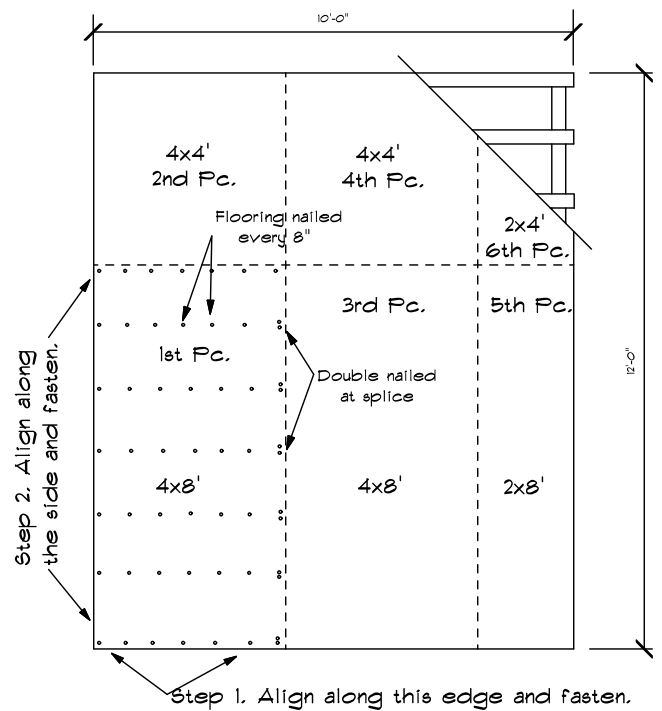


Front View

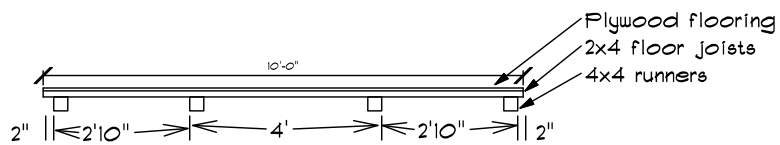


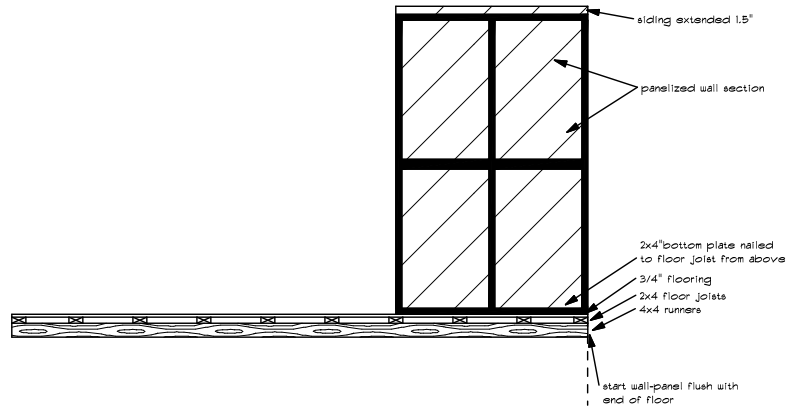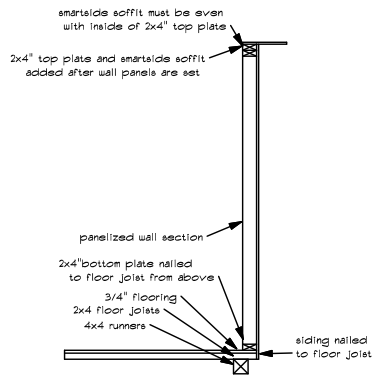


Inside View - Sidewalls 3

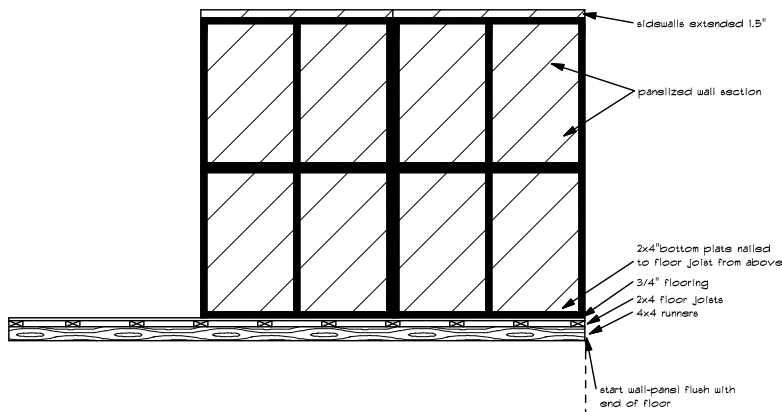

Inside View - Sidewalls 4

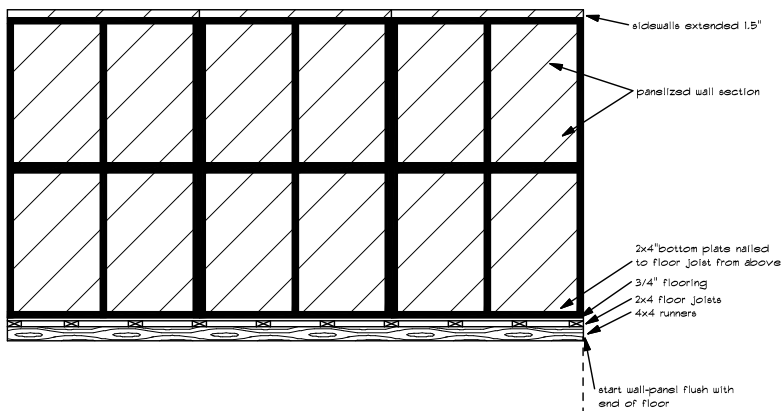


Inside View - Sidewalls 5

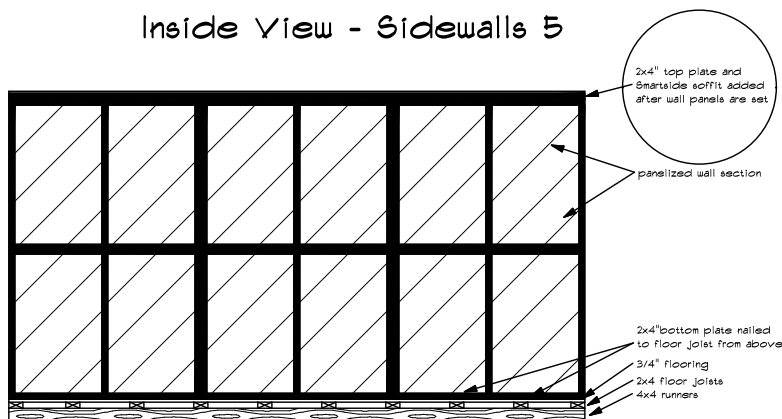



Top View - Wall Panels Page 3.

Note: This is only an example of a 10x12' building.
 Your particular building size may have different sized wall panels.
 Refer to the paperwork included with your packing list for more details.

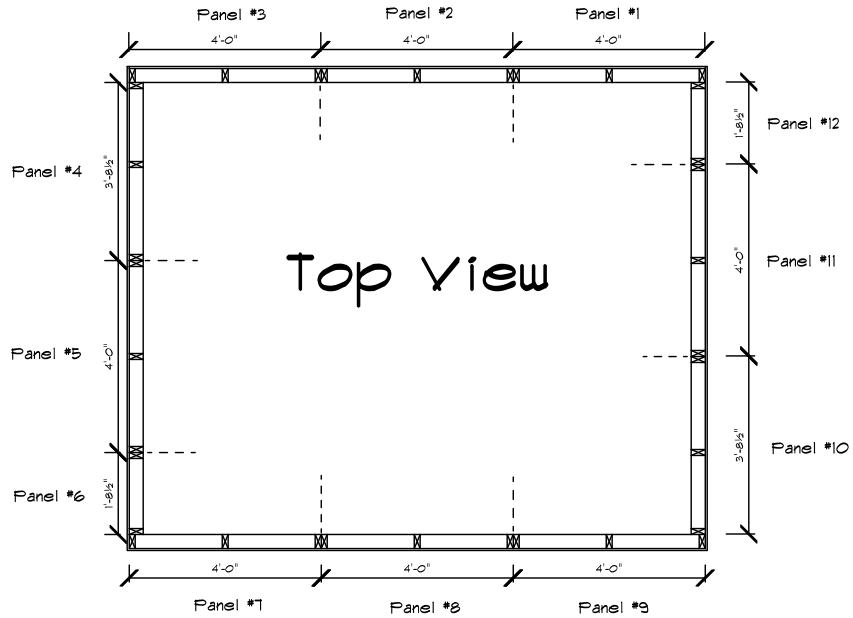


Top View - 2x4" Top/Plates

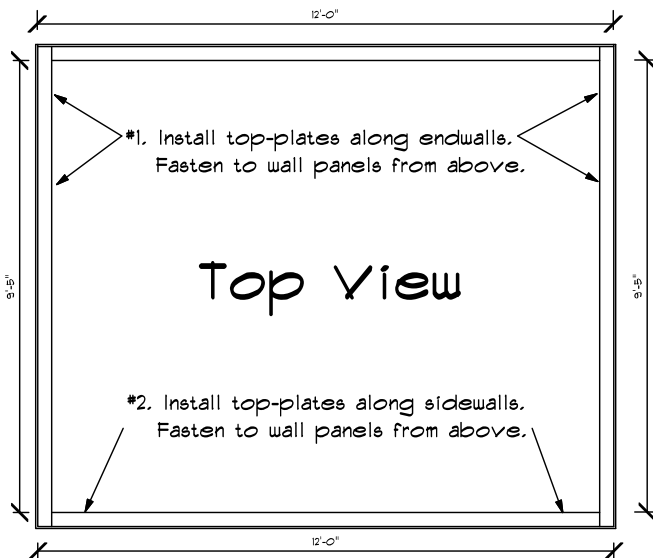


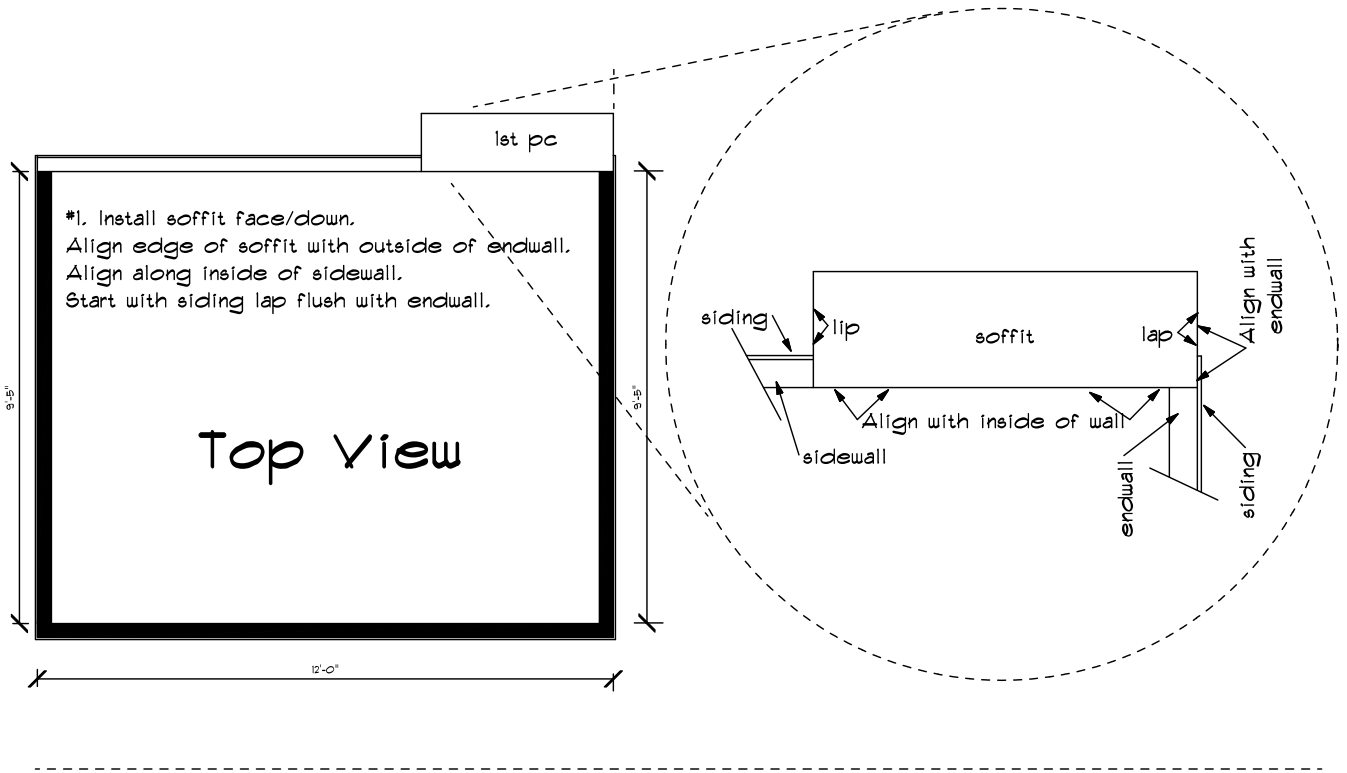

Top View - Smartside Soffit 2

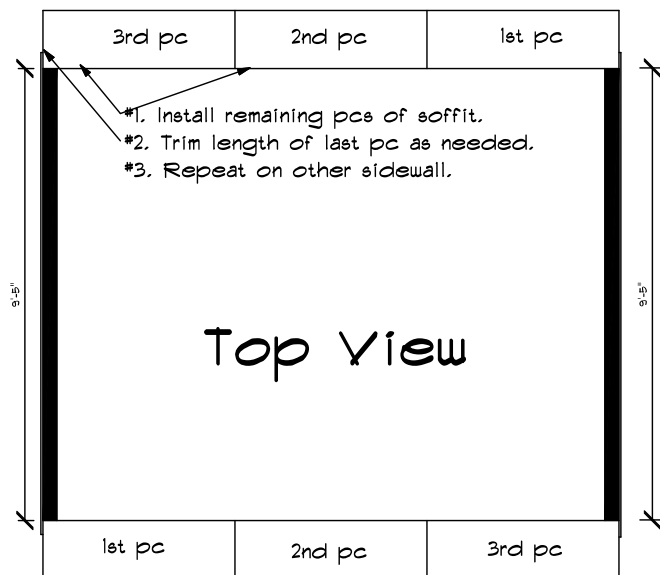


Top view of floor

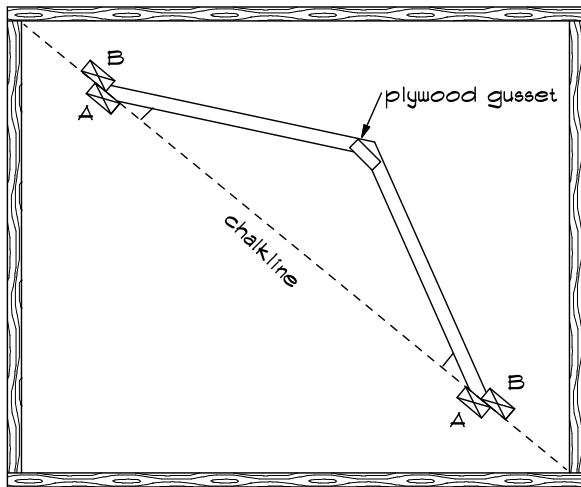

- #1... snap a chalk-line across the corners of floor.
- #2...put 2 stops along bottom of chalk-line (stop"A")
- #3...measure correct distance for overall width of rafter and put down stops "B".
- #4... match up peak of rafters and fasten gussets.



Overall width of rafter for Riverside, Heritage and Homestead:
 8' wide building: 9'10"
 10' wide building: 11'10"
 12' wide building: 13'10"
 Overall width of rafter for Cornerstone:
 8' wide building: 8'4"
 10' wide building: 10'4"
 12' wide building: 12'4"

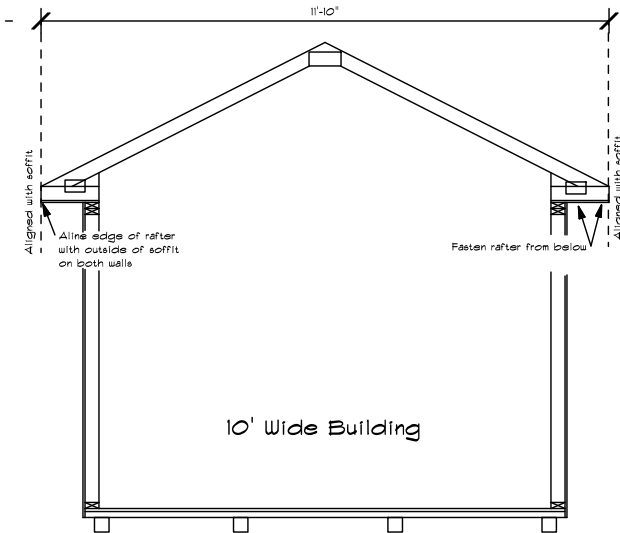

- #1... fasten both gable end rafters first.
NOTE: both gable rafters have a brace.
- #2...make sure both sidewalls are straight and brace walls from inside as needed.
- #3... fasten remainder of rafters as shown


Rafters - Side View

Close-up View

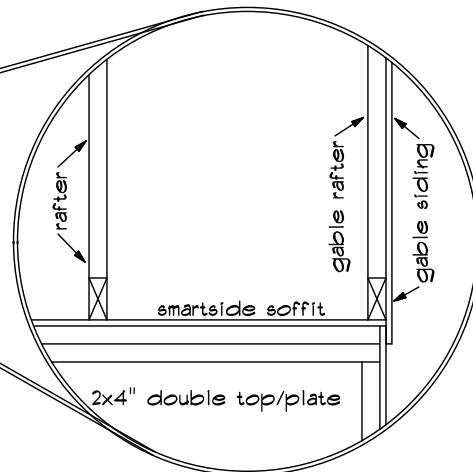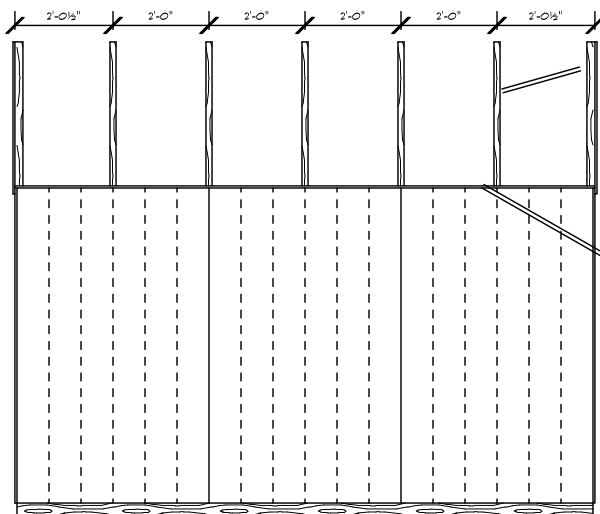



Gable/end Siding Overlay

End View

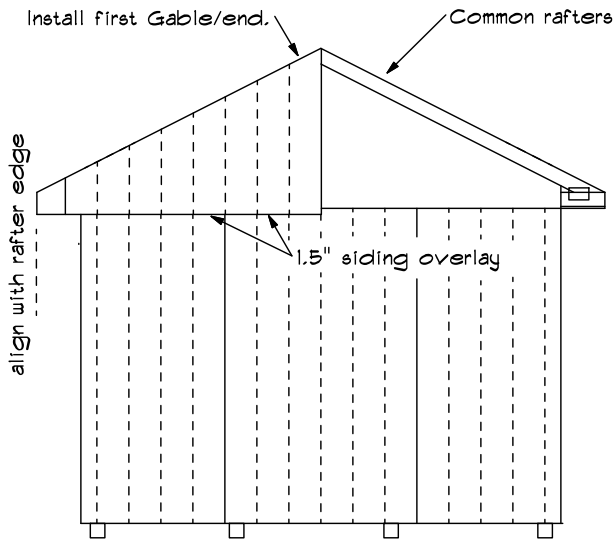


Side view

Inside | Outside

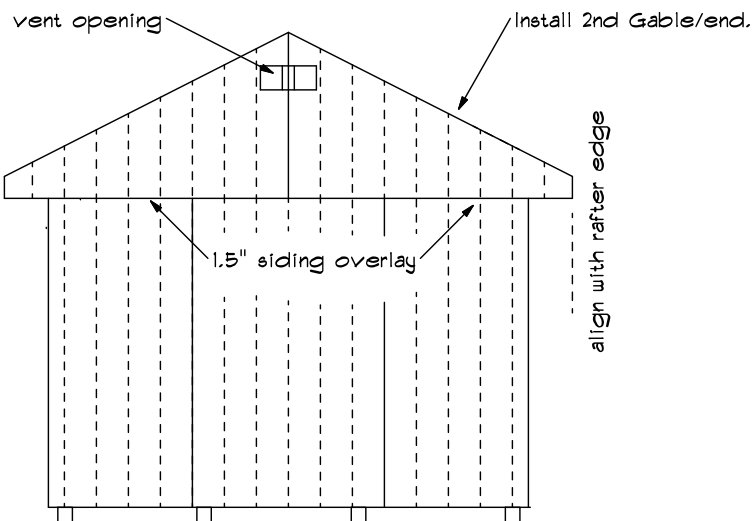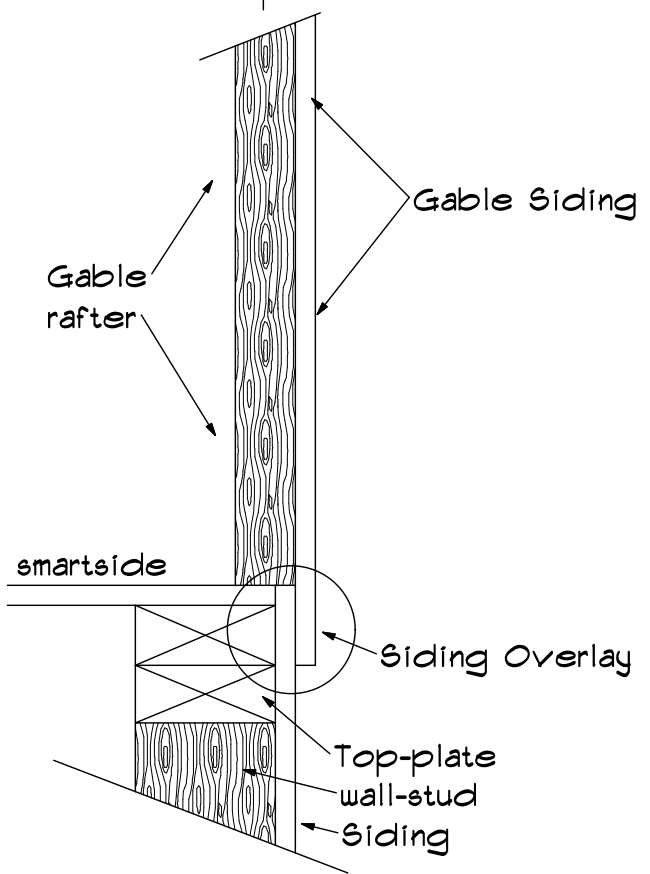


roof sheathing 1

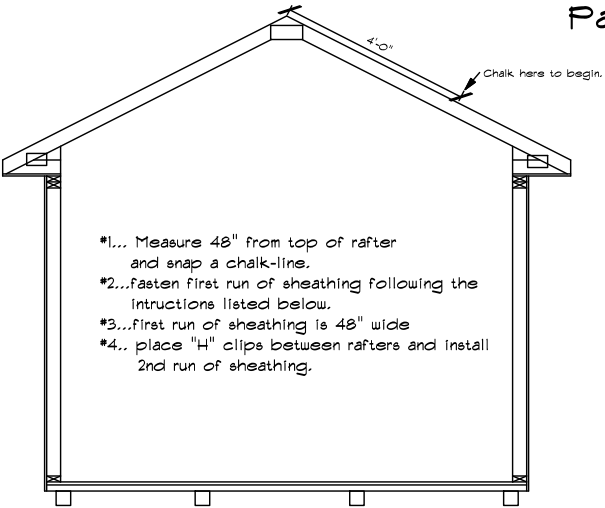


- *1... Measure 48" from top of rafter and snap a chalk-line.
- *2...fasten first run of sheathing following the instructions listed below.
- *3...first run of sheathing is 48" wide
- *4.. place "4" clips between rafters and install 2nd run of sheathing.

roof sheathing 2

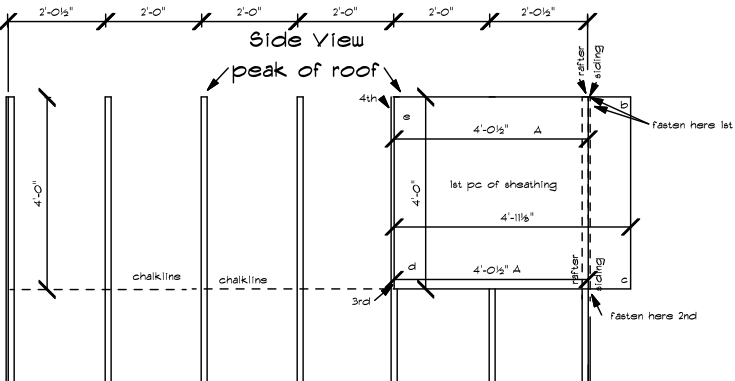


- Top of wall
- *1... snap a chalkline 48" from top of rafter.
 - *2... begin with 48"x 59 1/8" sheathing
 - *3... mark sheathing 48 1/2" from the left side.(A)
 - *4... 48 1/2" mark goes where the outside of the rafter and the inside of the siding meet.
 - *5... fasten top right corner first.(b)
 - *6... fasten bottom right corner (c)
 - *7... place bottom of sheathing on chalkline and side of sheathing on center of rafter and fasten. (d)
 - *8... fasten 4th corner (e) and remainder of sheet

roof sheathing 3

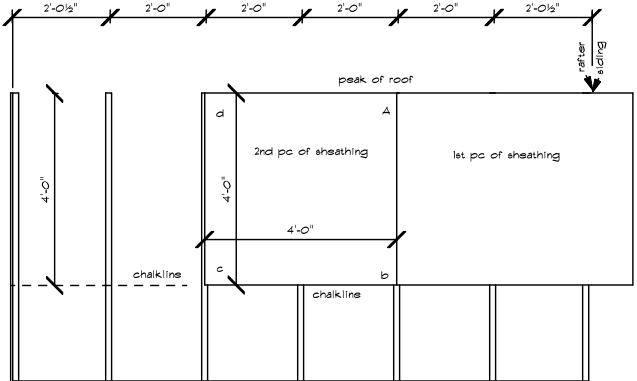


- *1... fasten top right corner first. (A)
- *2... fasten bottom right corner second (b)
- *3... place bottom of sheathing on chalkline and end of sheathing on center of rafter and fasten. (c)
- *4... fasten 4th corner (d) and remainder of sheet

roof sheathing 4

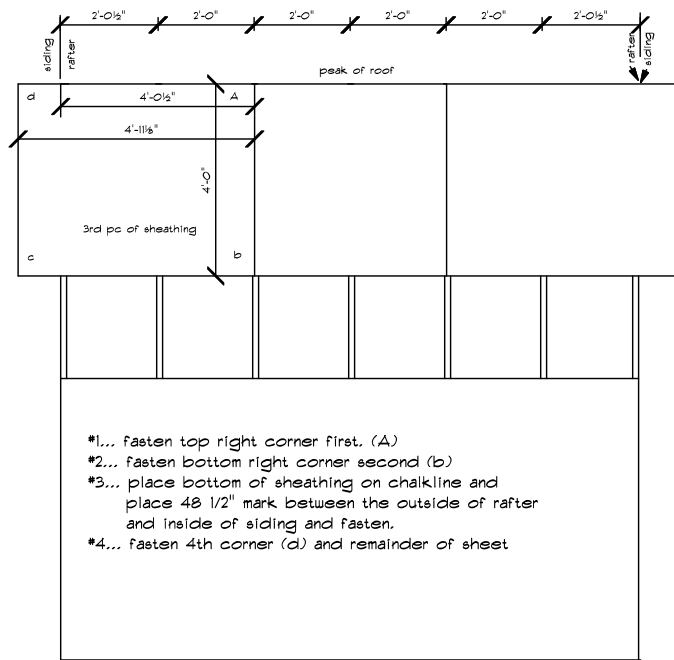


- #1... fasten top right corner first. (A)
- #2... fasten bottom right corner second (b)
- #3... place bottom of sheathing on chalkline and place 48 1/2" mark between the outside of rafter and inside of siding and fasten.
- #4... fasten 4th corner (d) and remainder of sheet

roof sheathing 5

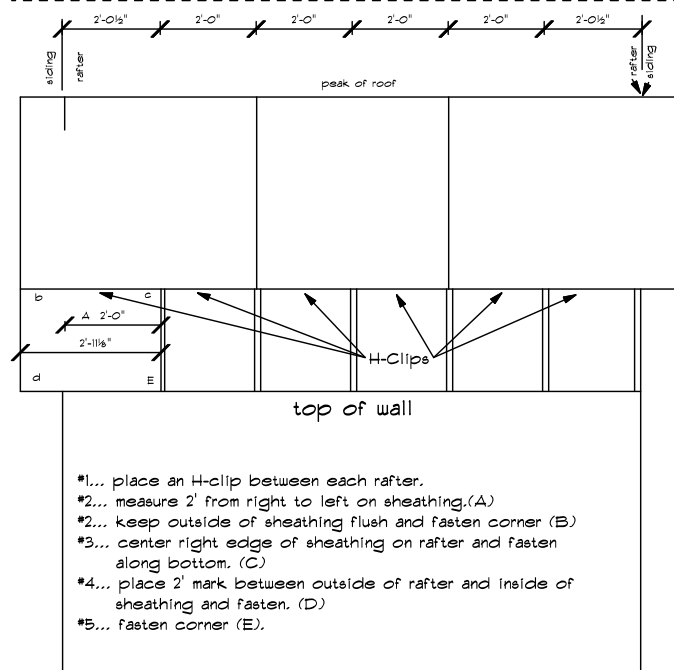

- #1... place an H-clip between each rafter.
- #2... measure 2' from right to left on sheathing.(A)
- #3... keep outside of sheathing flush and fasten corner (B)
- #4... center right edge of sheathing on rafter and fasten along bottom. (C)
- #5... place 2' mark between outside of rafter and inside of sheathing and fasten. (D)
- #6... fasten corner (E).


roof sheathing 6

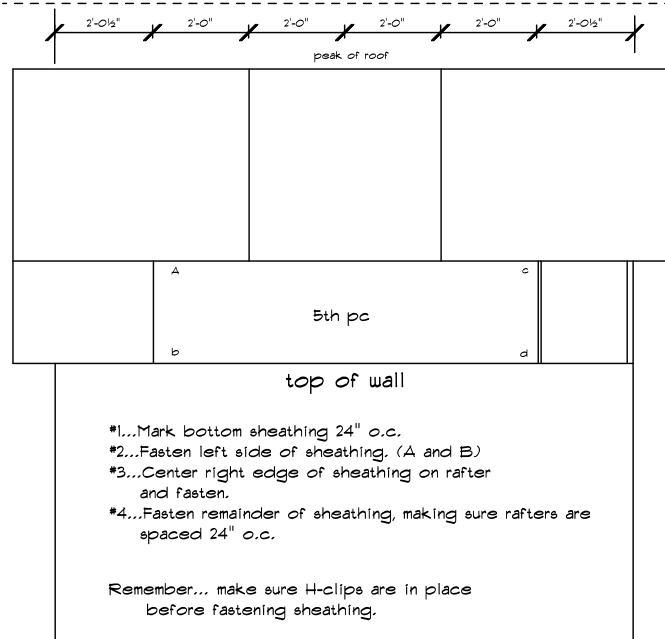

- #1...Mark bottom sheathing 24" o.c.
- #2...Fasten left side of sheathing. (A and B)
- #3...Center right edge of sheathing on rafter and fasten.
- #4...Fasten remainder of sheathing, making sure rafters are spaced 24" o.c.


Remember... make sure H-clips are in place before fastening sheathing.

Roof Trim 1

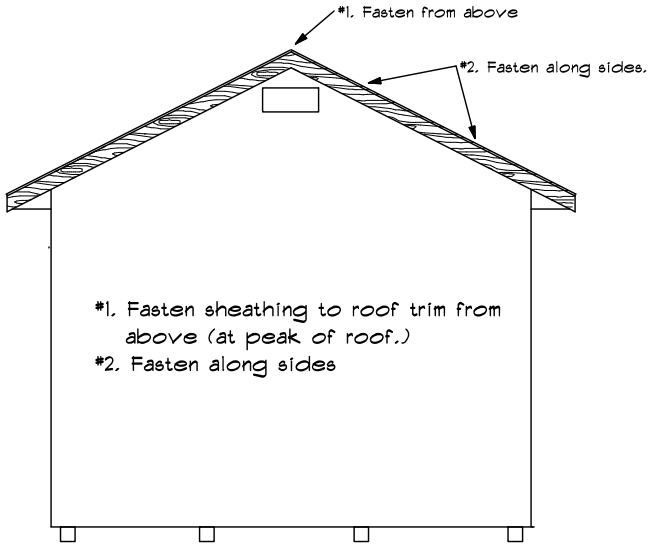


Roof Trim 2

Page 9.

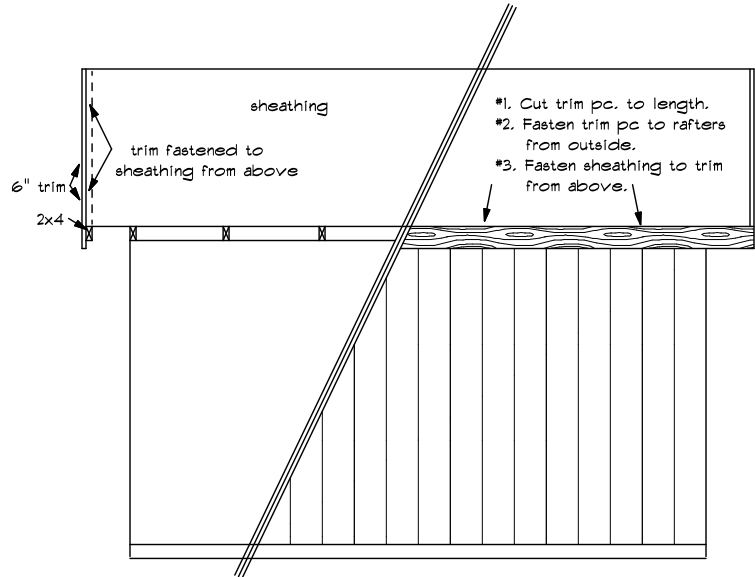

- #1. Install corner trim
- #2. Install windows & shutters
NOTE: be sure to caulk both behind window & above top window trim piece.
- #3. Install door hardware. Drill a 7/16" hole 2" in from the edge of the siding on the right/hand door.

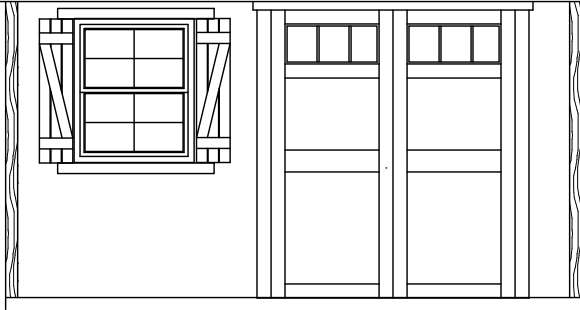

Your building is now ready to be shingled and painted. We recommend using aluminum dripedge along the roof edges.

ON THE INSIDE:

Fasten the wall/panel bottom plates to the floor joists. (nailing down thru the plywood flooring.)
Fasten the wall corner-studs together.
Cut out the 2x4"s in the bottom of the door opening. (these aren't needed.)

ON THE DOOR:

Be sure the 2x4x60" header is fastened to the top of the door opening. (actual door opening should be 72" tall x 60" wide.)